


## One / Two Line LED Sign

---

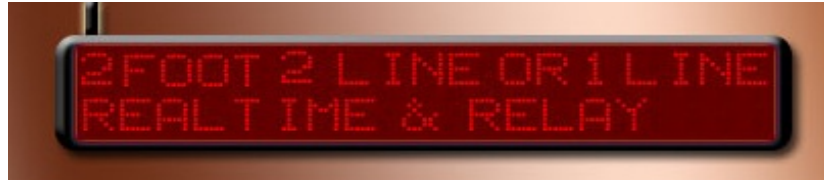

---

# AS112(r)

Narrow Band and Wide Band Capable  
Alpha LED display  
10-40 characters per line depending on the mode  
Display memory of 163,200 bytes  
4.75" characters can be read at a distance of up to 200 feet  
Display 10 to 40 characters per line depending on the mode  
Real Time Clock  
Wireless data input; provide 3 different data format:  
Text mode:  
Accepts 2,000 characters per message.  
408-473MHz  
512 / 1200 for POCSAG  
25KHz  
POCSAG  
6 Capcodes for POCSAG  
160 x 16  
10/4.75  
Case: 710 (L) x 160(H) x 70(W) mm  
Approximately 3,865g

---

### Features

- ▶ 6 Capcode Capacity
- ▶ Relay Control output Capcode (option)
- ▶ Paging Receiver Integrated – POCSAG
- ▶ Scroll or Fixed Message Display
- ▶ Clear Message by Reset Message or Set Time Out